

LEON S. AVAKIAN, INC. *Consulting Engineers*

788 WAYSIDE ROAD • NEPTUNE, NEW JERSEY 07753

LEON S. AVAKIAN, P.E., P.L.S. (1953-2004)
PETER R. AVAKIAN, P.E., P.L.S., P.P.
MEHRYAR SHAFI, P.E., P.P.
GREGORY S. BLASH, P.E., P.P., CPWM
LOUIS J. LOBOSCO, P.E., P.P.
GERALD J. FREDA, P.E., P.P.
JENNIFER C. BEAHM, P.P., AICP
CHRISTINE L. BELL, P.P., AICP
SAMUEL J. AVAKIAN, P.E., P.L.S., P.P.

February 6, 2023
February 10, 2023

Borough of Bradley Beach
Land Use Board
701 Main Street
Bradley Beach, NJ 07720

**Re: Alonzo Residence
Block 14, Lot 9
121 Newark Avenue
Borough of Bradley Beach
Our File: BBPB 22-20**

Dear Chairman and Board Members:

Our office has received an application submitted for Board review in connection with the above referenced project. Submitted with the application are the following:

- An architectural plan consisting of three (3) sheets prepared by Michael J. Moss, R.A. of Moss Architecture, LLC, dated October 20, 2021, with the latest revisions dated January 23, 2023.
- A survey of property consisting of one (1) sheet prepared by Michael J. Williams, P.L.S. of Michael J. Williams Land Surveying, LLC, dated March 23, 2021, with no revisions.

The application has been deemed complete. Our office has reviewed the plans to determine if they conform with the requirements of the Borough Ordinance and report as follows:

1. **Property Description**

- A. The property is located at house number 121 Newark Avenue (Lot 9, Block 14) with a total area of 1,000 square feet.
- B. The existing lot contains a one-story single-family dwelling with a front porch.
- C. The Applicant is proposing to remove the dwelling in its entirety and is proposing a 2 ½ story dwelling.

2. **Zoning and Land Use**

- A. The property is located in the R-B Residential Beachfront Zone and single-family dwelling is a permitted principal use in this zone.
- B. The proposed improvements require Board Approval for variances with front, side, and rear yard setbacks, building coverage, impervious coverage, number of stories and others described in this report. The property has existing non-conformities with lot area, lot width and lot depth.

3. **Variances and Waivers**

- A. In accordance with Section 450-13, permitted yard encroachments, the following variances or existing non-conformities are noted below:
 - 1) In accordance with Section 450-13.A.(2), (porch setbacks), for permitted residential structures a porch may extend 8 feet into the required front yard setback area, provided the principal structure conforms to the front yard setback requirement or by submission of the appropriate "Setback Averaging" plan as reflected in Ordinance 450-26.D.(7). A "Wrap-Around" porch may exceed the width of the existing or proposed structure, as long as it is in compliance with side setback requirements for the principal structure. The Applicant did not provide a setback averaging plan **calculation**. The permitted **average** porch setback is ~~17~~ **7.98** feet along Newark Avenue. The Applicant is proposing a porch front yard setback of 2.59 feet. **A variance is required.**
 - 2) In accordance with Section 450-13.B.(2), (upper porch setbacks), for permitted residential structures may extend 8 feet into the required front yard setback area, provided the principal structure conforms to the front yard setback requirement or by submission of the appropriate "Setback Averaging" plan as reflected in Ordinance 450-26.D.(7). A "Wrap-Around" Upper Porch on corner lots only may exceed the width of the existing or proposed structure, as long as it is in compliance with front yard setback requirements for the principal structure. The Applicant did not provide a setback averaging plan **calculation**. The permitted **average** upper porch setback is ~~17~~ **7.98** feet along Newark Avenue. The Applicant is proposing an upper porch along front yard setback of 2.59 feet. **A variance is required.**

B. In accordance with Section 450-28.D(1) area, yard, and building requirements for a single-family dwelling is subject to the requirements and limitations in Section 450-26.D. The following variances or existing non-conformities are noted below:

- 1) In accordance with Section 450-26.D.(1)(a), the minimum lot area permitted per the zoned district is 5,000 square feet. The existing lot area is 1,000 square feet, which represents an existing non-conformity.
- 2) In accordance with Section 450-26.D.(1)(b), the minimum lot width permitted per the zoned district is 50 feet. The existing lot width is 20 feet, which represents an existing non-conformity.
- 3) In accordance with Section 450-26.D.(1)(c), the minimum lot depth permitted per the zoned district is 100 feet. The existing lot depth is 50 feet, which represents an existing non-conformity.
- 4) In accordance with Section 450-26.D(1)(d), the minimum front yard setback permitted for a street east to west (Newark Avenue) is 25 feet and for a street running north to south is 15 feet, or the minimum depth of any front yard within the block and fronting on the same street on which the structure fronts, whichever is greater. When the prevailing setback of the existing buildings along a block front is less than the setback requirements, the front yard setback distance may be reduced to the average of front yard setbacks of principal structures on all developed properties on the same side of the street within 200 feet of the property as documented by a map prepared by a licensed land surveyor. The average depth will be from the front wall of the structure, provided that such setback is not less than 10 feet. Front porches shall also be averaged within 200 feet on each side of the lot and within the same block front. The Applicant ~~did~~ not provide the average front yard setback. ***The average front yard setback is 13.09 feet.*** The Applicant is proposing a front yard setback of 8.59 feet. **A variance is required.**
- 5) In accordance with Section 450-26.D.(1)(e), the minimum side yard setback permitted per the zoned district is 5 feet and 10 feet. For lots not meeting the minimum lot width requirement that exists shall be 10% (2.0 feet) and 20% (4.0 feet) of the lot width.

The Applicant is proposing a side yard setback of 3.0 feet on the east side and a setback of 3.0 feet on the west side. One side yard setback conforms, and **the other side yard setback requires a variance.**

- 6) In accordance with Section 450-26.D.(1)(f), the minimum rear yard setback per the zoned district is 25 feet. The Applicant is proposing a rear yard setback of 6.75 feet. **A variance is required.**
 - 7) In accordance with Section 450.26.D.(1)(h), the maximum building coverage permitted is 35% of the lot area. The Applicant is proposing a building coverage of 56.9%. **A variance is required.**
 - 8) In accordance with Section 450.26.D.(1)(i), the maximum impervious coverage permitted is 60% of the lot area. The Applicant is proposing an impervious coverage of 64.0%. **A variance is required.**
 - 9) In accordance with Section 450-26.D.(1)(j), the minimum off-street parking is two (2) spaces per dwelling unit. The Applicant should provide testimony.
- C. In accordance with Section 450-26.E.(2), the living space of single-family dwellings on lots that are either less than 4,000 square feet or less than 40 feet of frontage shall not exceed 2-stories and 30 feet in height. The Applicant is proposing a building height of 29.83 feet, which conforms. The Applicant is proposing a 2 ½ story dwelling. **A variance is required.**

4. **General Comments**

- A. General Note should be added to the plan indicating the existing curb and sidewalk along the frontage will be replaced if found in poor condition.
- B. A General Note should be added to the plan indicating the planting area between the sidewalk and curb must remain natural grass.
- C. **Our office recommends the proposed roof drains should be piped to a pop-up emitter in the front yard, because of the lot size. The last pipe section should be perforated pipe surrounded by stone.**
- D. **Since the Applicant is proposing a basement, our office recommends a soil boring. The soil boring should indicate the boring elevation and seasonal high water table elevation.**
- E. The Applicant should provide information that taxes are currently paid.
- F. The Applicant shall secure any and all construction permits needed for the project.


Our office reserves the right to provide additional comments upon receipt of revised plans.

121 Newark Avenue
February 6, 2023
Revised February 10, 2023
Page 5 of 5

If you have any questions, or require additional information on this matter, please do not hesitate to contact our office.

Very truly yours,

LEON S. AVAKIAN, INC.

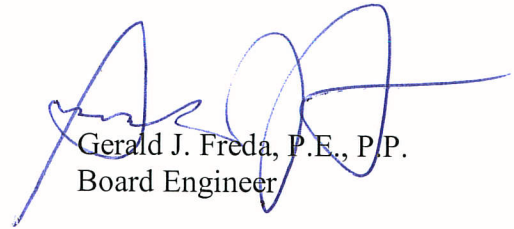

Gerald J. Freda, P.E., P/P.
Board Engineer

DMH:mfl

cc: Kristie Dickert, Board Secretary
Mark Kitrick, Esq. Board Attorney
Jeffrey Beekman, Esq., Applicant's Attorney
Michael J. Moss, R.A., Applicant's Architect
BB/PB/22/22-20b